


# L4L OY34 20CX2

85-265VAC Large Integrated Oyster LED Lights

*'Instant-ON', 13" & 16" Oyster LED lights with greater and more ambient illumination replacing circular fluoro tubes or Dual-CFL in Oyster fittings. Lower your electricity bills instantly and eradicate UV radiation, Mercury and other dangerous chemicals from homes, apartments and hotels.*



fully integrated unit

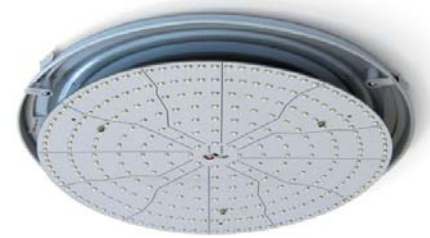


retrofit module only

13"  
16"

10<sub>w</sub> = 18<sub>w</sub> ●

20<sub>w</sub> = 36<sub>w</sub> ●

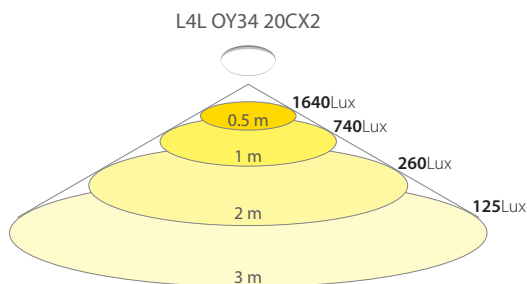

## Specifications

Max. Power	10W (retrofit module), 20W (Integrated Unit 13" & 16")
LED Class/Brand	Surface Mount Technology (SMT) Tier 1 CREE USA / Lextar
Special Features	Oyster retrofit module (plate) or fully integrated unit C.C. Driver (EMC, LVD/Safety Certified). Dimmable option
LED Lifespan	50,000h
IP Rating	IP54 (restricted outdoor use under canopy/eaves)
Luminosity (@Cool)	1,120L (retrofit module), 1,670L (13" or 16" unit) at proximity
Mains Voltage	85-265VAC 50-60Hz (Solar-READY 12/24VDC on request)
Beam Angle	120° standard
White Colour temp (K)	Cool/Day (4000), Warm (3100), optional Hospital/COI (4300)
Trim-Finish/Lens	Frosted Lens
Power Factor	>0.955 (Commercial/Industrial Grade)
CRI (Ra)	74-86
Dimensions mm (in)	Outer Diameter: Integrated Units 340 (13.4"), 410 (16.1") Mounting Depth: Integrated Units 100 (4")



100% Recyclable



Disposable



No Lead



No Argon



No Mercury



No UV



No Hazardous Substances



N29587 Australian Certification



International Certification



North America Certification





The premier and most comprehensive range of affordable mainstream LED retrofit bulbs and Integrated LED systems. Backed by **Photometrics** and being **Precision-engineered**, these **Tier1 LEDs** are produced with first-class components from the USA. With up to **140lm/W** high-luminosity, our high-efficiency LEDs come with a '**Full 3-Year replacement Guarantee**'. We produce over 300 varieties to **directly retrofit** all existing popular light fittings. Our **long-life, safety-certified** products **can be used near people** and offer the consumer **up to 90% savings on lighting energy bills and maintenance costs** because they simply use **1/10 the energy** of Incandescent or Halogen bulbs of similar luminosity. Consuming less than **1/4 the energy** of the short-life, vibration-prone Mercury Vapour, Sodium gas-discharge and Fluorescent lamps, they have overtaken them and the Mercury-laden Fluoro CFLs as the energy-efficient, yet **healthy lighting source of choice**.

## 85-265VAC Large Integrated Oyster LED Lights

STOCK ITEM

ORDER CODE	DIAMETER	DEPTH	COLOUR TEMP	MAX. WATTS	CTN/QTY
L4L OY28 10CX2	280mm (11")	Plate ONLY	4000K – Cool White (Day)	10	50
L4L OY28 10WX2	280mm (11")	Plate ONLY	3100K – Warm White	10	50
L4L OY28 10HX2	280mm (11")	Plate ONLY	4300K – Hospital Grade	10	50
L4L OY28 10 x X2-D	10W Dimmable Driver (Trailing-Edge Dimmer)			10	MOQ

L4L OY34 20CX2	340mm (13.4")	100mm (4")	4000K – Cool White (Day)	20	5
L4L OY34 20WX2	340mm (13.4")	100mm (4")	3100K – Warm White	20	5
L4L OY34 20HX2	340mm (13.4")	100mm (4")	4300K – Hospital Grade	20	5
L4L OY34 20 x X2-D	20W Dimmable Driver (Trailing-Edge Dimmer)			20	MOQ

L4L OY41 20CX2	410mm (16.1")	100mm (4")	4000K – Cool White (Day)	20	5
L4L OY41 20WX2	410mm (16.1")	100mm (4")	3100K – Warm White	20	5
L4L OY41 20HX2	410mm (16.1")	100mm (4")	4300K – Hospital Grade	20	5
L4L OY41 20 x X2-D	20W Dimmable Driver (Trailing-Edge Dimmer)			20	MOQ
L4L OY41 20 x X2-E	Emergency and EXIT unit with Battery and Inverter kit			20	



LED4Life® PTY. LTD. NORTH AMERICA, INC.

**1-300-LED4LIFE**  
Customer Service

90 Minnamorra Avenue  
Earlwood NSW 2206 Australia

T. +61(0)2.8213.0763  
F. +61(0)2.9591.1781  
E. info@LED4Life.com.au  
www.LED4Life.net

**1-888-LED4LIFE**  
Customer Service

1740 H Dell Range Boulevard  
Cheyenne WY 82009 USA

T. +1.816.510.8131  
F. +1.816.228.4949  
E. info@LED4Life.com  
www.LED4Life.com